


WBPF-B002


Electrical Specifications

Parameter	Frequency [MHz]	Specification -40°C to 85°C	Typical Value @25°C
Center Frequency	2017.5		
Band Width	80		
Insertion Loss	1977.5 – 2057.5	3.0dB max	1.7dB
Passband Ripple	1977.5 – 2057.5	1.0dB max	0.7dB
Return Loss	1977.5 – 2057.5	12dB min	16dB
Attenuation			
Impedance		50 Ohm	50 Ohm
Input power		1Watt max	

Electrical Performance

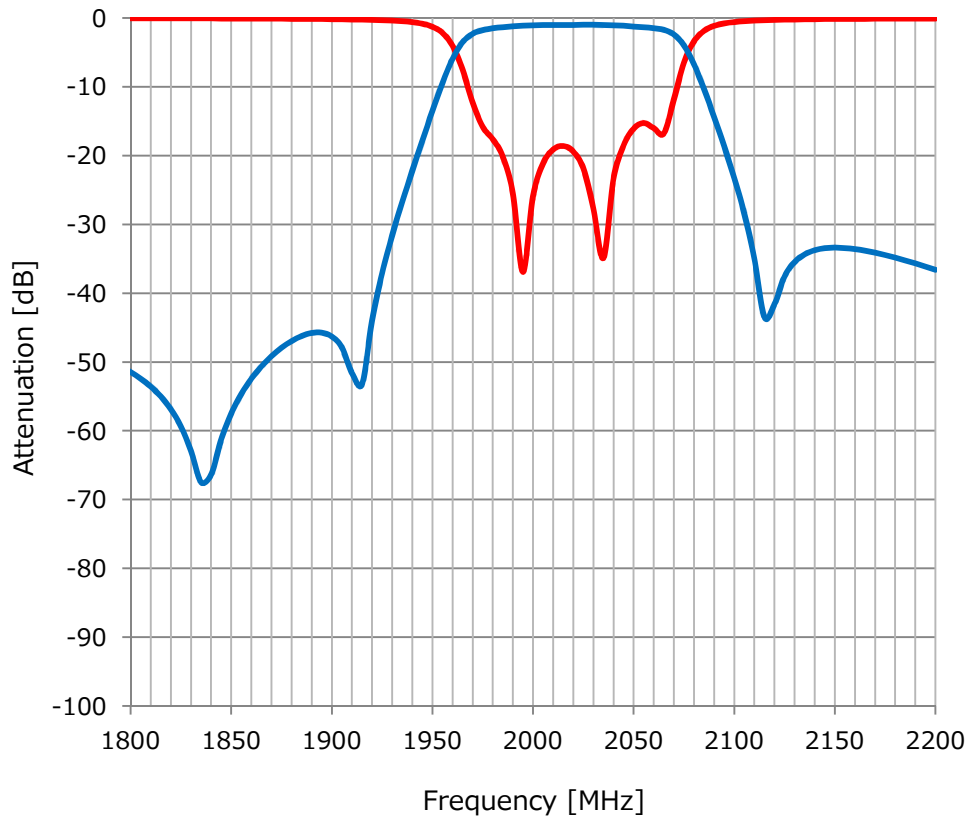

Mechanical Dimension

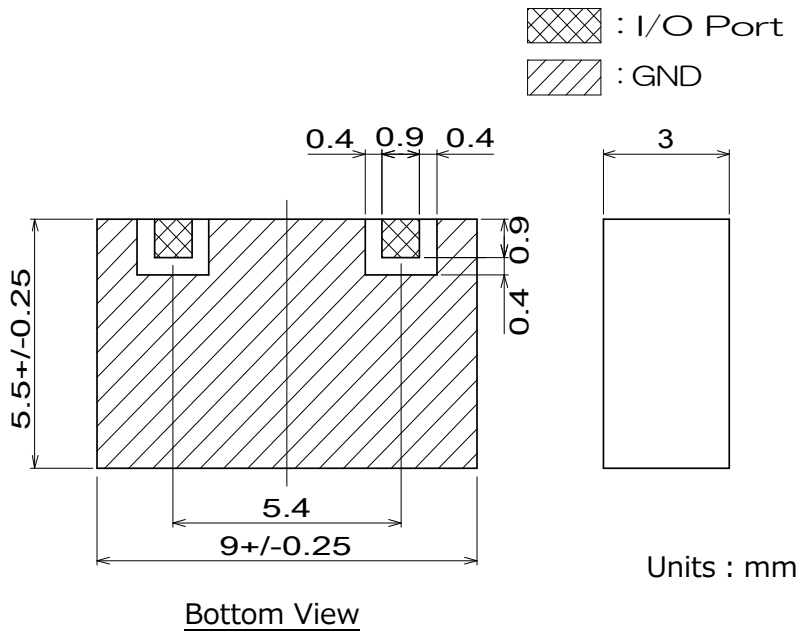

Tolerance unless otherwise specified : +/-0.2mm

Referenced Land Pattern

