


WBPF-F001


Electrical Specifications

Parameter	Frequency [MHz]	Specification -40°C to 85°C	Typical Value @25°C
Center Frequency	1268		
Band Width	24		
Insertion Loss	1256 – 1280	0.6dB max	0.35dB
Passband Ripple	1256 – 1280	-	-
VSWR	1256 – 1280	1.5 max	1.2
Attenuation			
Impedance		50 Ohm	50 Ohm
Input power		1Watt max	

Electrical Performance

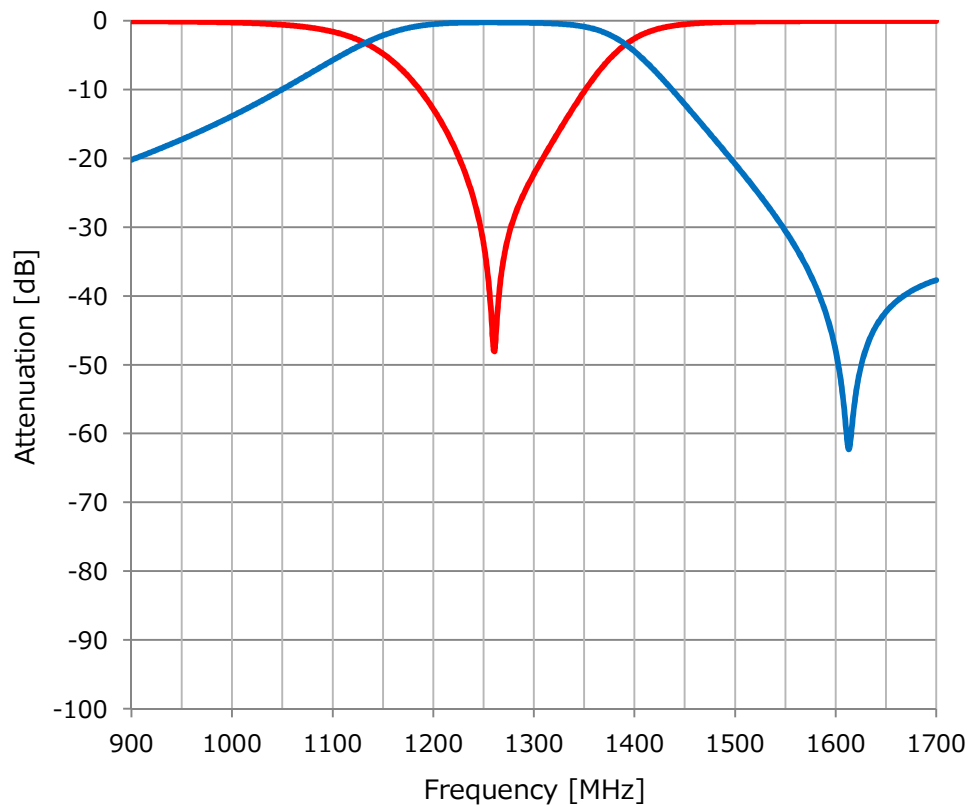

Mechanical Dimension

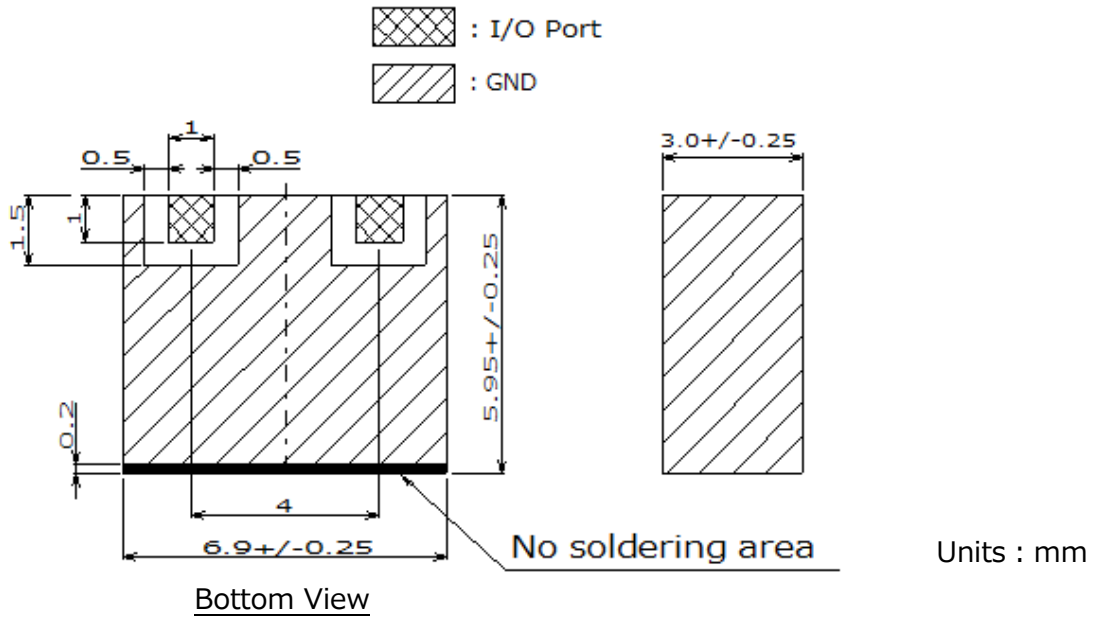

Tolerance unless otherwise specified : +/-0.2mm

Referenced Land Pattern

