


# WDUP-A004


## Electrical Specifications

Parameter	Frequency [MHz]	Specification -10°C to 45°C	Typical Value @25°C
TX to ANT / ANT to TX			
Insertion Loss	880 – 915	3.5dB max	3.2dB
Passband Ripple	880 – 915	3.0dB max	2.4dB
VSWR	880 – 915	1.8 max	1.4
Attenuation	925 – 960	40dB min	46dB
ANT to RX / RX to ANT			
Insertion Loss	925 – 960	3.0dB max	2.6dB
Passband Ripple	925 – 960	2.5dB max	1.9dB
VSWR	925 – 960	1.8 max	1.4
Attenuation	880 – 915	40dB min	42dB
Impedance		50 Ohm	50 Ohm
Input power		2Watt max	

## Electrical Performance

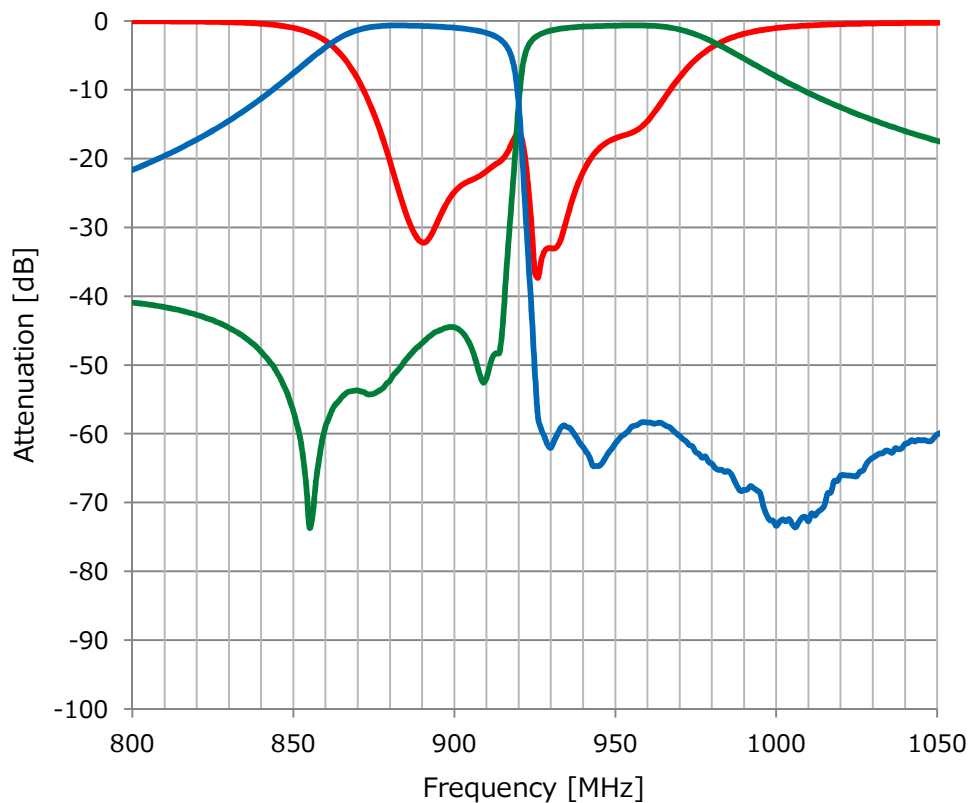

Mechanical Dimension

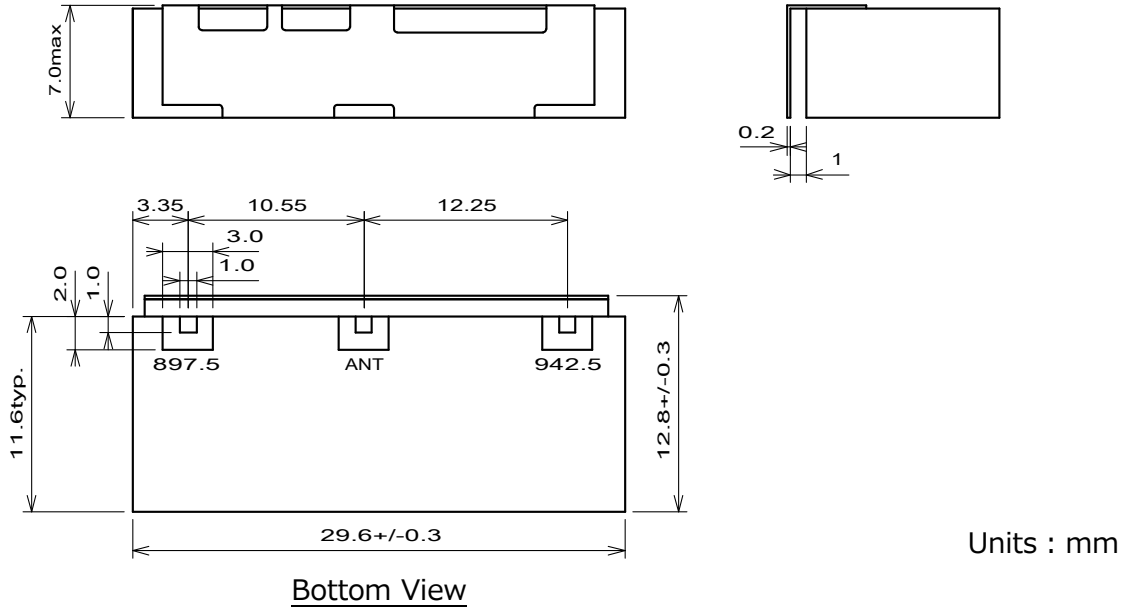

Tolerance unless otherwise specified : +/-0.2mm

Referenced Land Pattern

