


WDUP-A006


Electrical Specifications

Parameter	Frequency [MHz]	Specification -40°C to 85°C	Typical Value @25°C
TX to ANT / ANT to TX			
Insertion Loss	880 – 915	3.5dB max	3.1dB
Passband Ripple	880 – 915	3.0dB max	2.3dB
Return Loss	880 – 915	10dB min	14dB
Attenuation	925 – 960	45dB min	51dB
ANT to RX / RX to ANT			
Insertion Loss	925 – 960	4.0dB max	3.4dB
Passband Ripple	925 – 960	3.4dB max	2.7dB
Return Loss	925 – 960	10dB min	14dB
Attenuation	880 – 915	50dB min	53dB
Impedance		50 Ohm	50 Ohm
Input power		1Watt max	

Electrical Performance

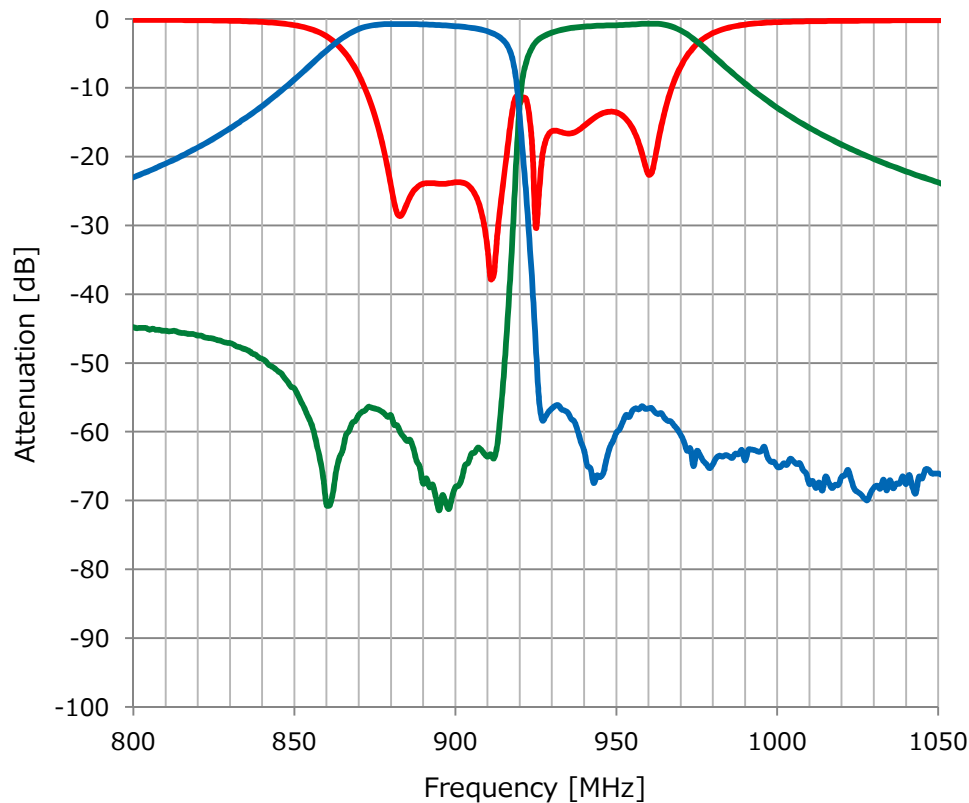

Mechanical Dimension

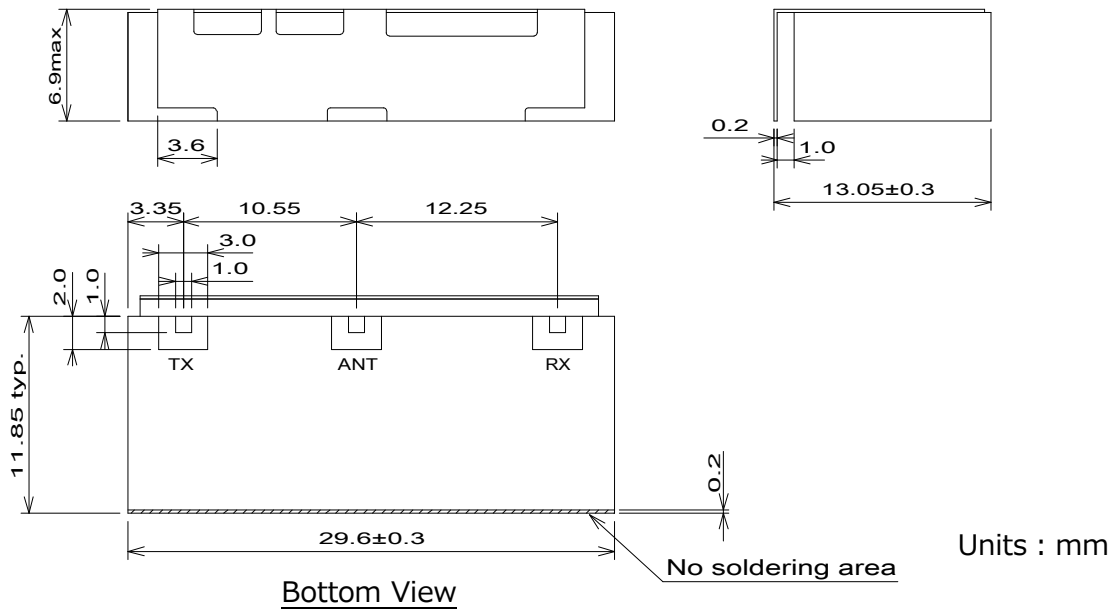

Tolerance unless otherwise specified : +/-0.2mm

Referenced Land Pattern

