


WDUP-A007


Electrical Specifications

Parameter	Frequency [MHz]	Specification -40°C to 85°C	Typical Value @25°C
TX to ANT / ANT to TX			
Insertion Loss	1710 – 1755	2.8dB max	2.0dB
Passband Ripple	1710 – 1755	1.8dB max	1.1dB
VSWR	1710 – 1755	1.8 max	1.5
Attenuation	2110 – 2155	35dB min	45dB
ANT to RX / RX to ANT			
Insertion Loss	2110 – 2155	2.5dB max	1.8dB
Passband Ripple	2110 – 2155	1.2dB max	0.7dB
VSWR	2110 – 2155	1.8 max	1.5
Attenuation	1710 – 1755	40dB min	45dB
Impedance		50 Ohm	50 Ohm
Input power		3Watt max	

Electrical Performance

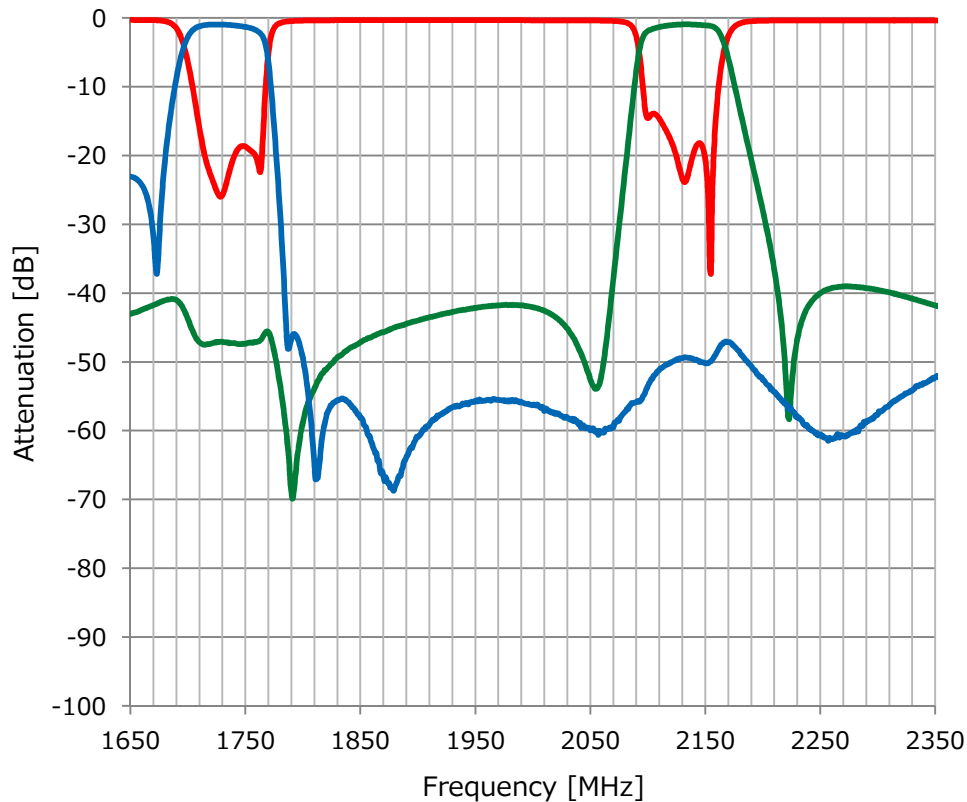

Mechanical Dimension

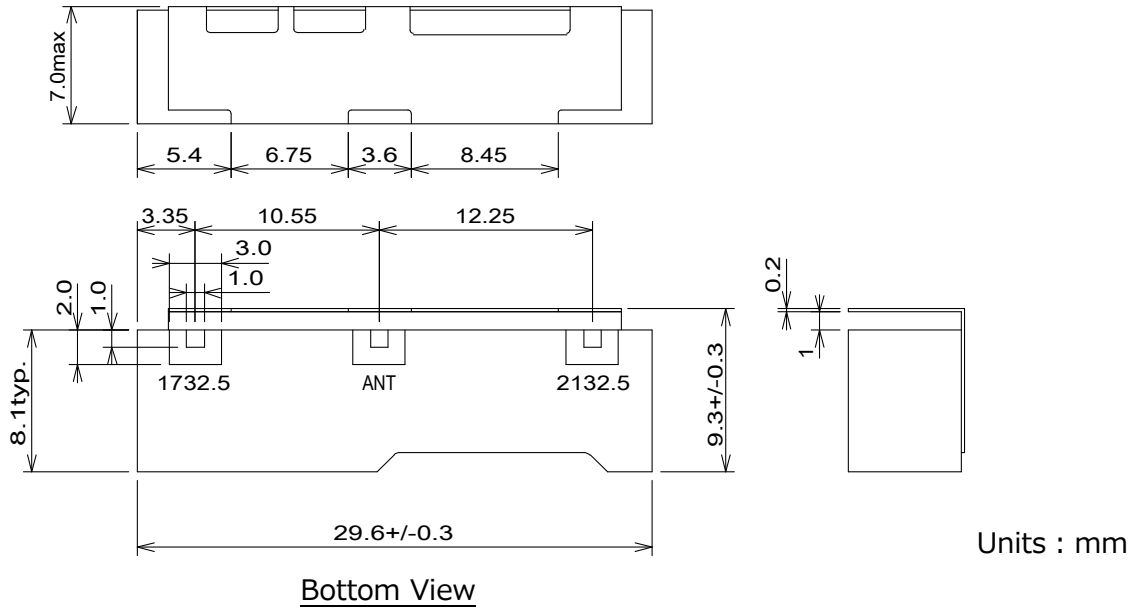

Tolerance unless otherwise specified : +/-0.2mm

Referenced Land Pattern

