


WDUP-A008


Electrical Specifications

Parameter	Frequency [MHz]	Specification -10°C to 45°C	Typical Value @25°C
TX to ANT / ANT to TX			
Insertion Loss	1710 – 1785	3.5dB max	2.7dB
Passband Ripple	1710 – 1785	3.0dB max	2.0dB
VSWR	1710 – 1785	1.8 max	1.5
Attenuation	1805 – 1880	40dB min	45dB
ANT to RX / RX to ANT			
Insertion Loss	1805 – 1880	3.0dB max	2.6dB
Passband Ripple	1805 – 1880	2.5dB max	2.0dB
VSWR	1805 – 1880	1.8 max	1.5
Attenuation	1710 – 1785	40dB min	44dB
Impedance		50 Ohm	50 Ohm
Input power		3Watt max	

Electrical Performance

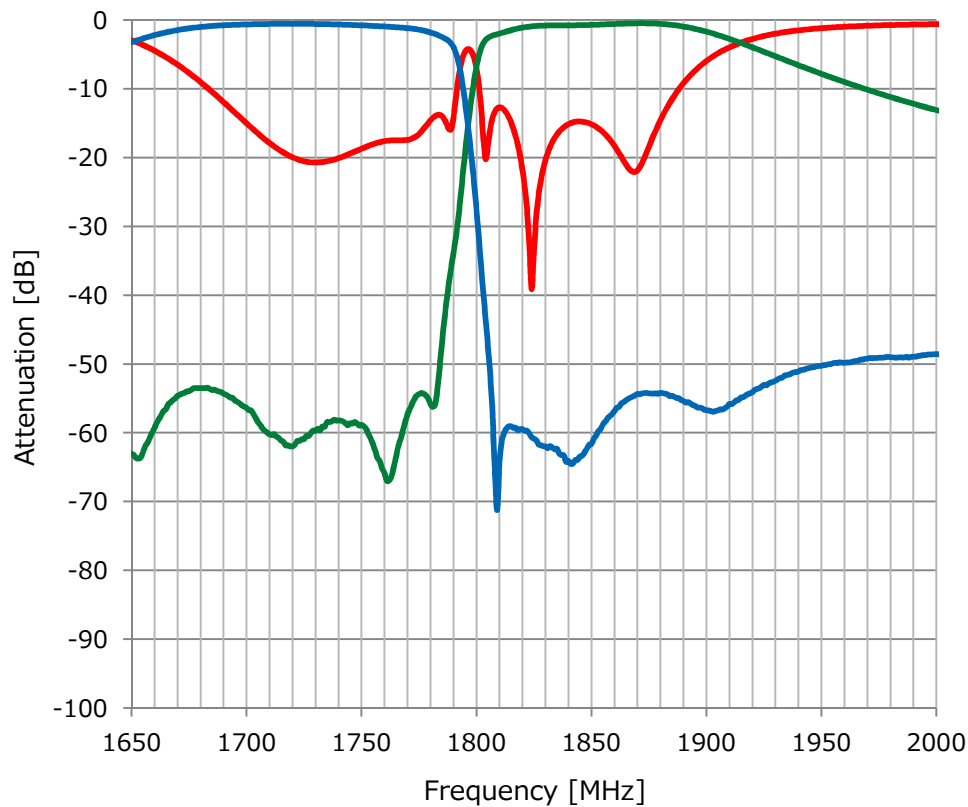

Mechanical Dimension

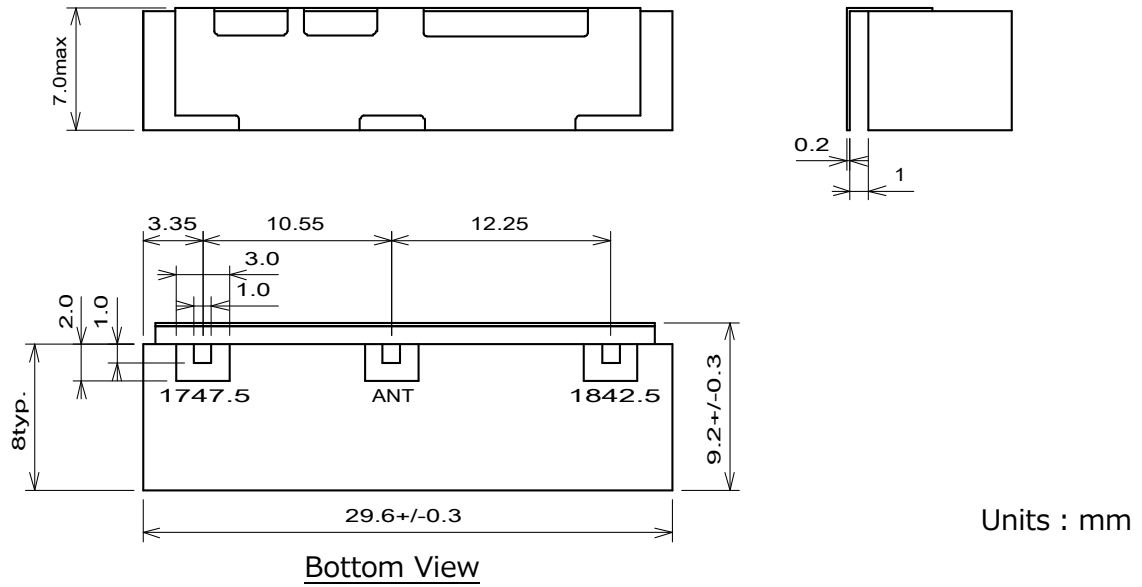

Tolerance unless otherwise specified : +/-0.2mm

Referenced Land Pattern

