


WDUP-A009


Electrical Specifications

Parameter	Frequency [MHz]	Specification -40°C to 85°C	Typical Value @25°C
TX to ANT / ANT to TX			
Insertion Loss	1710 – 1785	3.0dB max	2.3dB
Passband Ripple	1710 – 1785	2.0dB max	1.5dB
VSWR	1710 – 1785	1.8 max	1.5
Attenuation	1805 – 1880	40dB min	43dB
ANT to RX / RX to ANT			
Insertion Loss	1805 – 1880	3.0dB max	2.2dB
Passband Ripple	1805 – 1880	2.0dB max	1.6dB
VSWR	1805 – 1880	1.8 max	1.5
Attenuation	1710 – 1785	40dB min	47dB
Impedance		50 Ohm	50 Ohm
Input power		3Watt max	

Electrical Performance

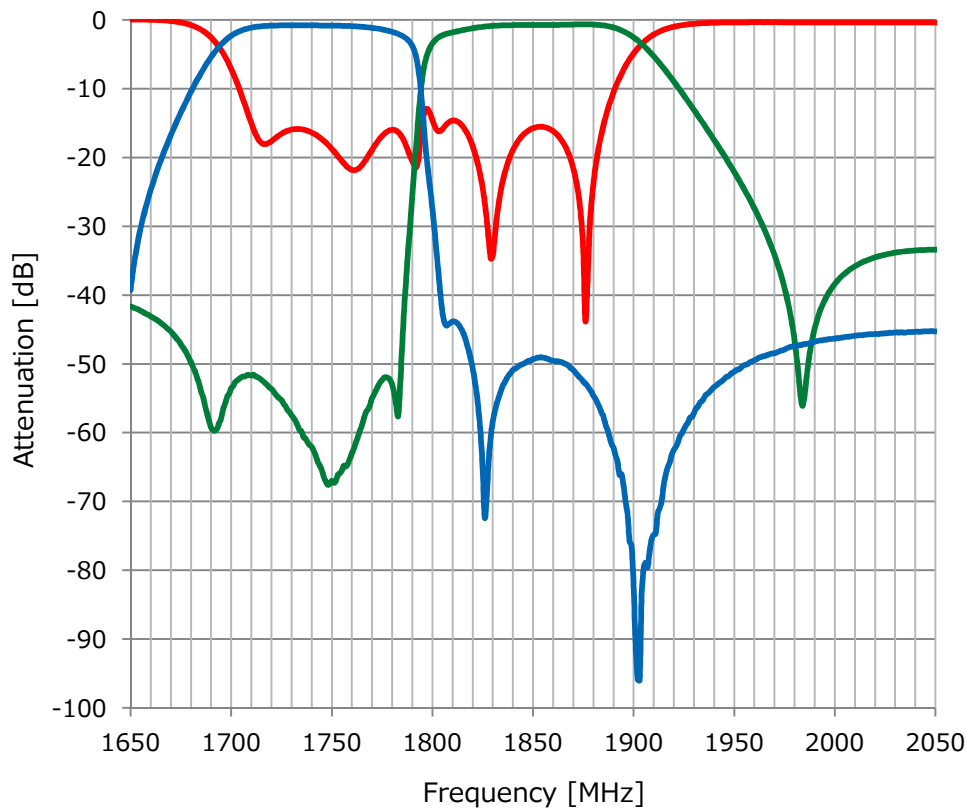

Mechanical Dimension

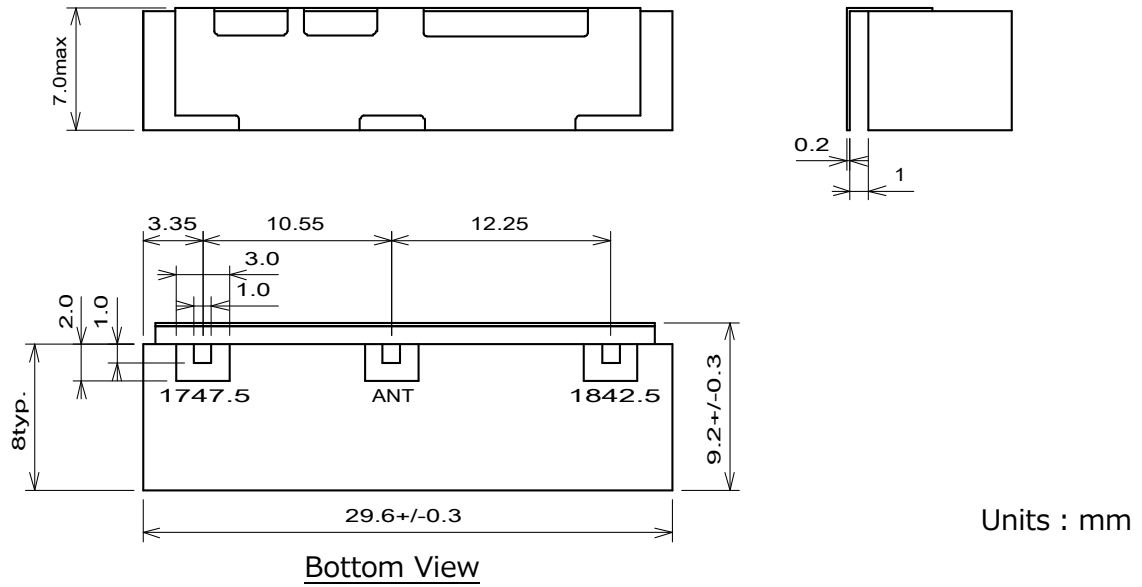

Tolerance unless otherwise specified : +/-0.2mm

Referenced Land Pattern

