


WDUP-A010


Electrical Specifications

Parameter	Frequency [MHz]	Specification -10°C to 45°C	Typical Value @25°C
TX to ANT / ANT to TX			
Insertion Loss	1850 – 1910	3.5dB max	2.7dB
Passband Ripple	1850 – 1910	3.0dB max	2.0dB
VSWR	1850 – 1910	1.8 max	1.5
Attenuation	1930 – 1990	40dB min	45dB
ANT to RX / RX to ANT			
Insertion Loss	1930 – 1990	3.0dB max	2.5dB
Passband Ripple	1930 – 1990	2.5dB max	1.5dB
VSWR	1930 – 1990	1.8 max	1.5
Attenuation	1850 – 1910	40dB min	44dB
Impedance		50 Ohm	50 Ohm
Input power		3Watt max	

Electrical Performance

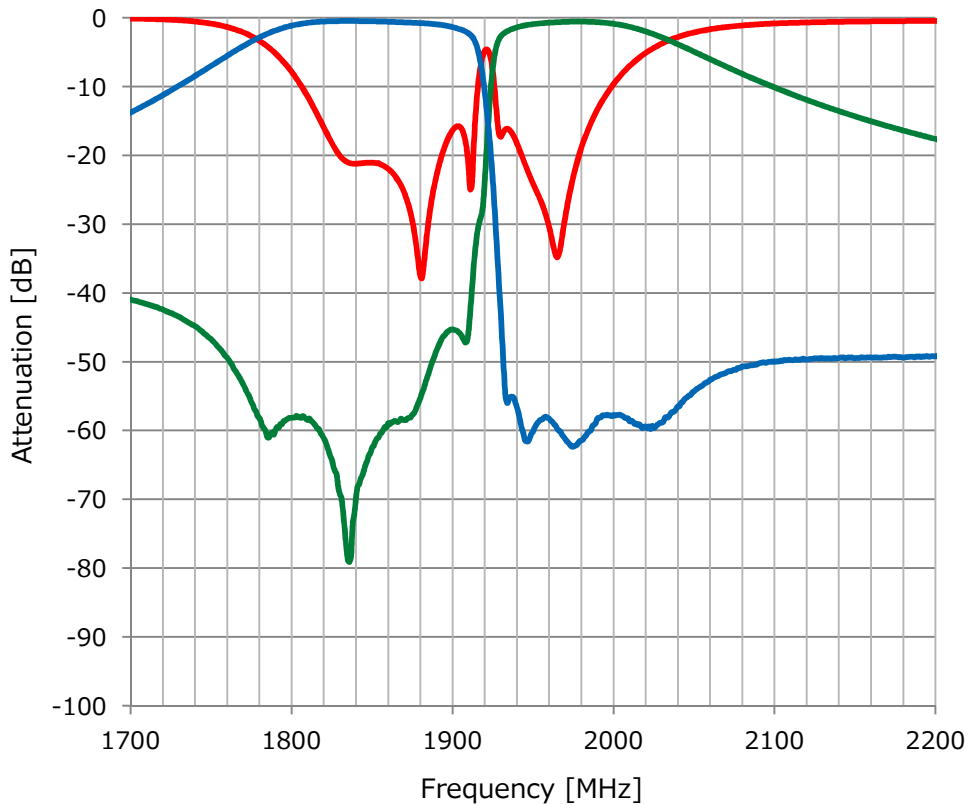

Mechanical Dimension

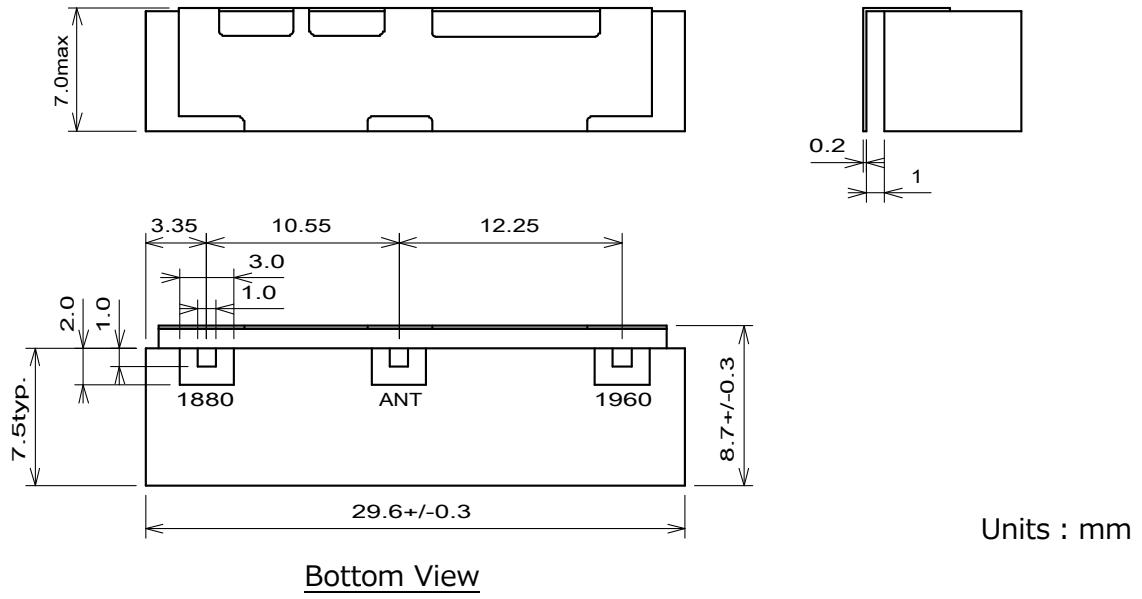

Tolerance unless otherwise specified : +/-0.2mm

Referenced Land Pattern

