


# WDUP-A014


## Electrical Specifications

Parameter	Frequency [MHz]	Specification -40°C to 85°C	Typical Value @25°C
ANT to RX / RX to ANT			
Insertion Loss	746 – 757	2.3dB max	1.8dB
Passband Ripple	746 – 757	0.8dB max	0.3dB
VSWR	746 – 757	1.8 max	1.5
Attenuation	776 – 787	48dB min	52dB
TX to ANT / ANT to TX			
Insertion Loss	776 – 787	2.3dB max	1.7dB
Passband Ripple	776 – 787	0.8dB max	0.3dB
VSWR	776 – 787	1.8 max	1.5
Attenuation	746 – 757	45dB min	53dB
Impedance		50 Ohm	50 Ohm
Input power		2Watt max	

## Electrical Performance

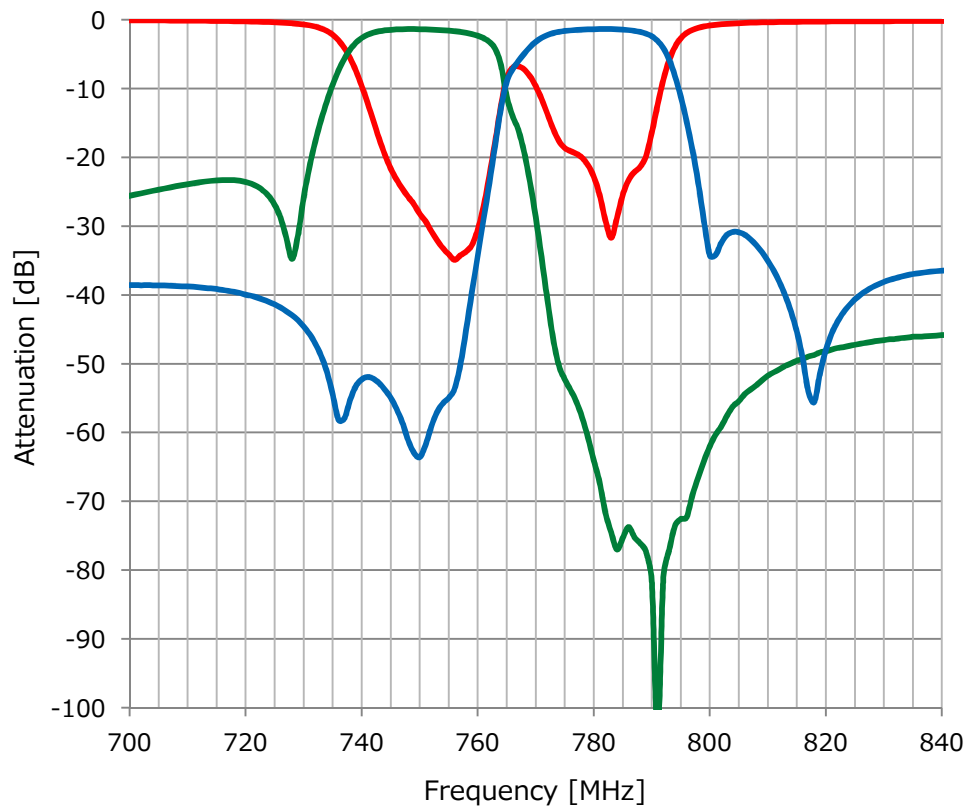


Mechanical Dimension

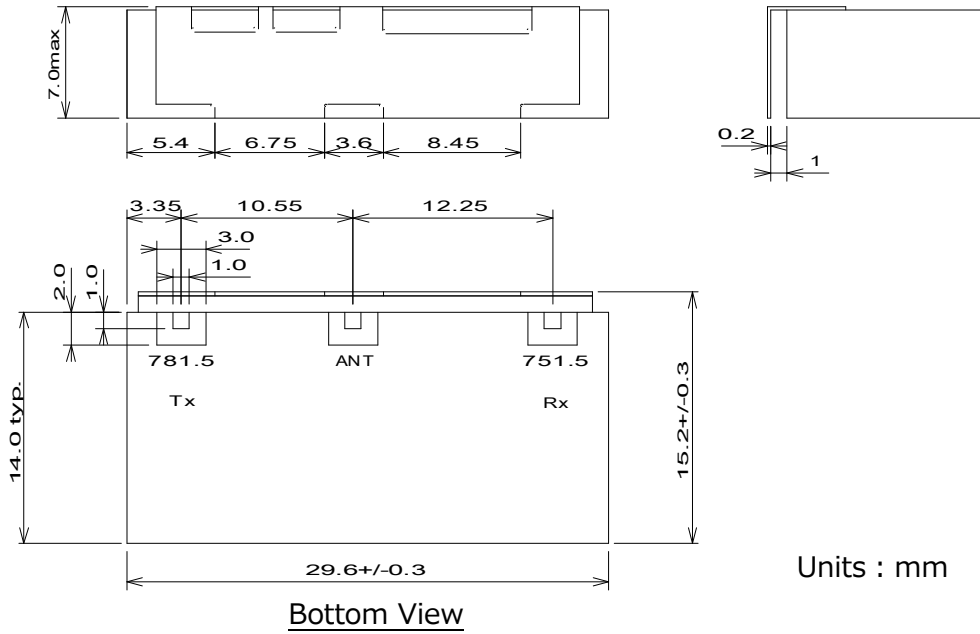

Units : mm

Tolerance unless otherwise specified : +/-0.2mm

Referenced Land Pattern

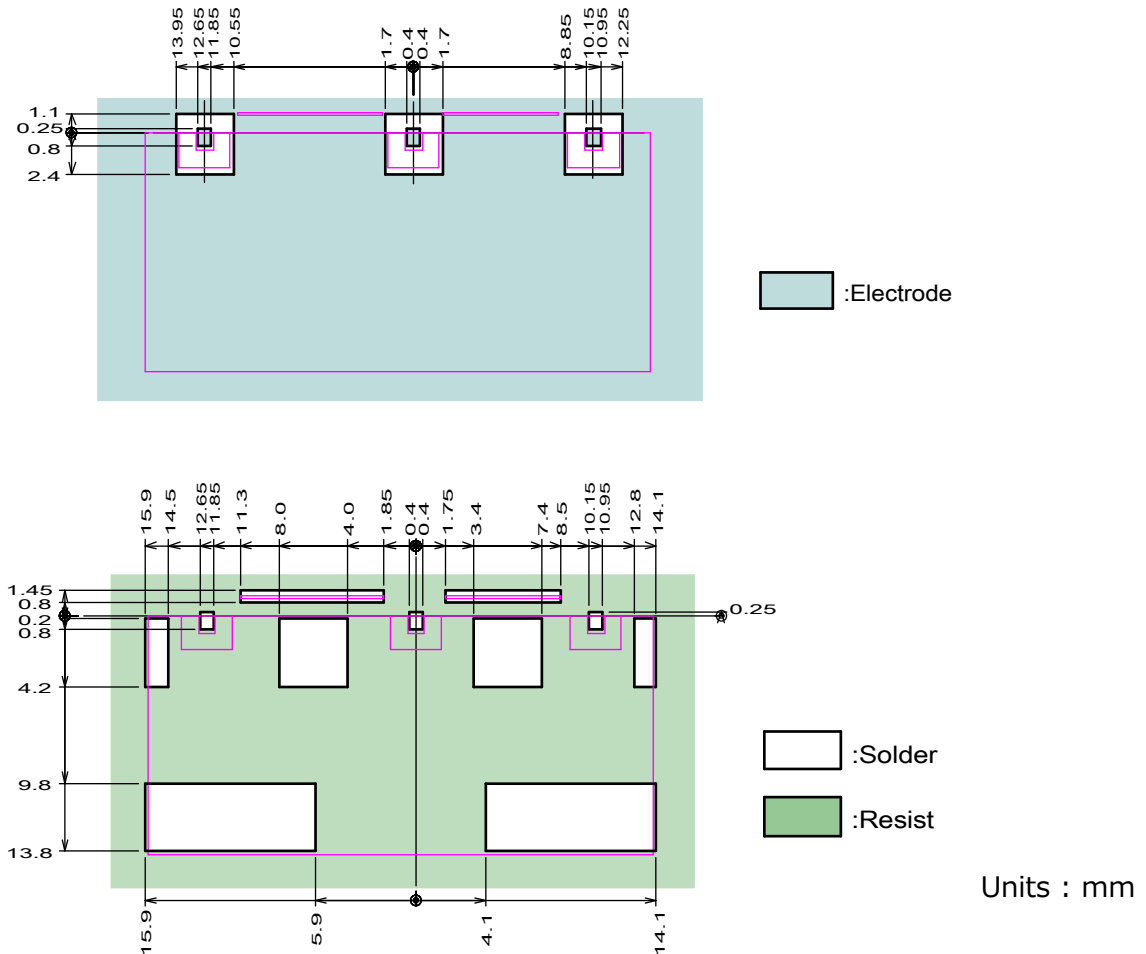

Units : mm